



DYTRAN PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DYTRAN INSTRUMENTS, INC. AND ANY REPRODUCTION IN PART OR AS A WHOLE OR ANY OTHER DISSEMINATION OF THIS INFORMATION WITHOUT THE WRITTEN PERMISSION OF DYTRAN INSTRUMENTS, INC. IS PROHIBITED.

REV	ECN	DESCRIPTION	BY/DATE	CHK	APPR
A	5992	INITIAL RELEASE	NC/5-14-09	DV	AS
B	6368	UPDATED DRAWING WITH SMALLER CABLE DIAMETER	NC/10-13-09	<i>ANS</i>	<i>ANS</i>

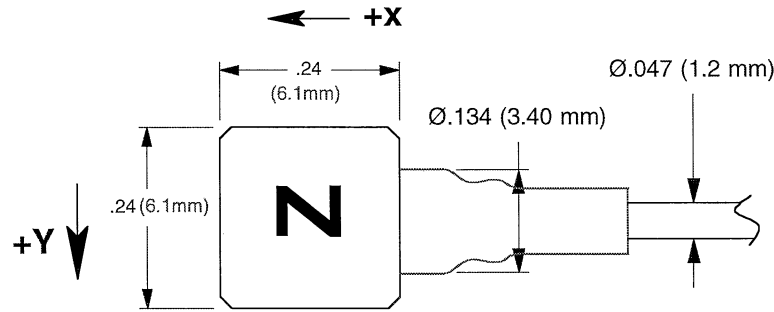


VARIATION CHART	
MODEL	SENSITIVITY
3133A1	10-15 mV/g
3133A2	2-5 mV/g
3133A3	5-10 mV/g

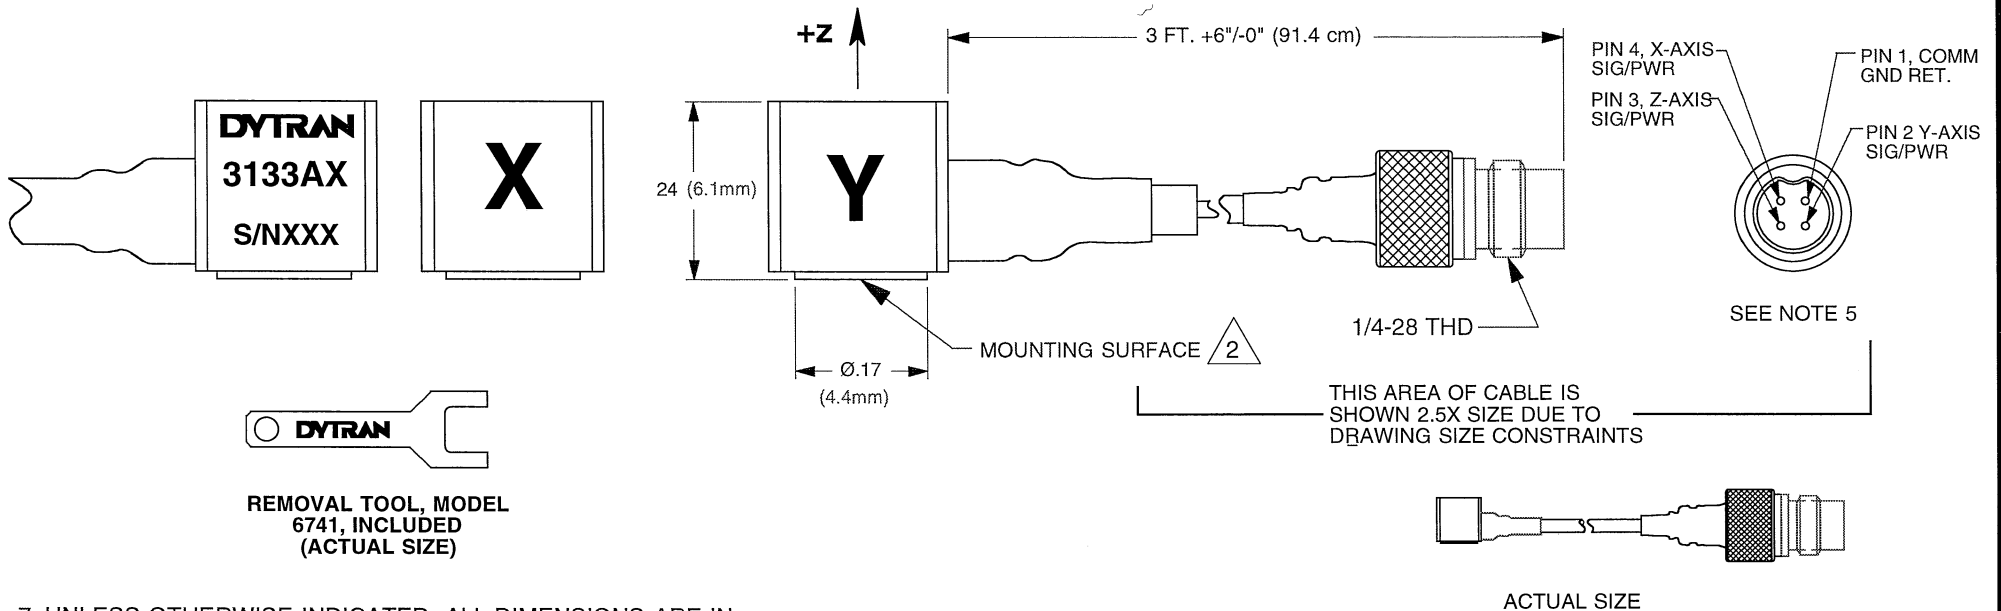

REMOVAL TOOL, MODEL 6741, INCLUDED (ACTUAL SIZE)

7. UNLESS OTHERWISE INDICATED, ALL DIMENSIONS ARE IN INCHES. mm DIMENSIONS ARE INDICATED BY PARENTHISES.
6. MODEL 6298 PETRO MOUNTING WAX IS INCLUDED.
5. MATING CABLES ARE MODELS 6824AXX (SANOPRENE), OR 6811AXX, (TEFLON) 4-PIN CONNECTOR TO 3 BNC's. "XX" IS THE CABLE LENGTH IN FEET.
4. HOUSING MATERIAL: TITANIUM.
3. THE LETTERS "X", "Y", & "Z" INDICATE THE DIRECTION OF ACCELERATION OF EACH AXIS FOR POSITIVE GOING OUTPUT VOLTAGE (AS THE MARKED SURFACE ACCELERATES TOWARD THE VIEWER.) SEE DIRECTIONAL ARROWS ON FACE OF DRAWING.
2. FOR BEST FREQUENCY RESPONSE, PREPARE FLAT MOUNTING SURFACE OF AT LEAST .20 DIAMETER, FLAT TO .0001 TIR. APPLY ONE DROP OF CYANOACRYLATE ADHESIVE TO MOUNT THE ACCELEROMETER.
1. WEIGHT, LESS CABLE: 0.8 GRAMS.



MASTER ONLY IF IN RED

CHATSWORTH, CA.

SCALE 4X	DESIGN N.C.	DATE 11-10-08		
DRAWN N.C.	DATE 11-10-08	PART NO. SEE CHART		
CHECKED D.V.	DATE 05-18-09	MATL		REV B
APPROVED ANS	DATE 05-26-09	NEXT ASSEMBLY	USED ON 3133A1, 3133A2, 3133A3	
TITLE OUTLINE/INSTALLATION DRAWING, MODEL SERIES 3133A TRIAXIAL ACCELEROMETERS			DWG NO. 127-3133A	
SHEET 1 OF 1				

