


VAR	PART NO.	MODEL	CABLE LENGTH
A03	128-6017A03	6017A03	3 FT
A05	128-6017A05	6017A05	5 FT
A10	128-6017A10	6017A10	10 FT
AXX	128-6017AXX	6017AXX	A/R

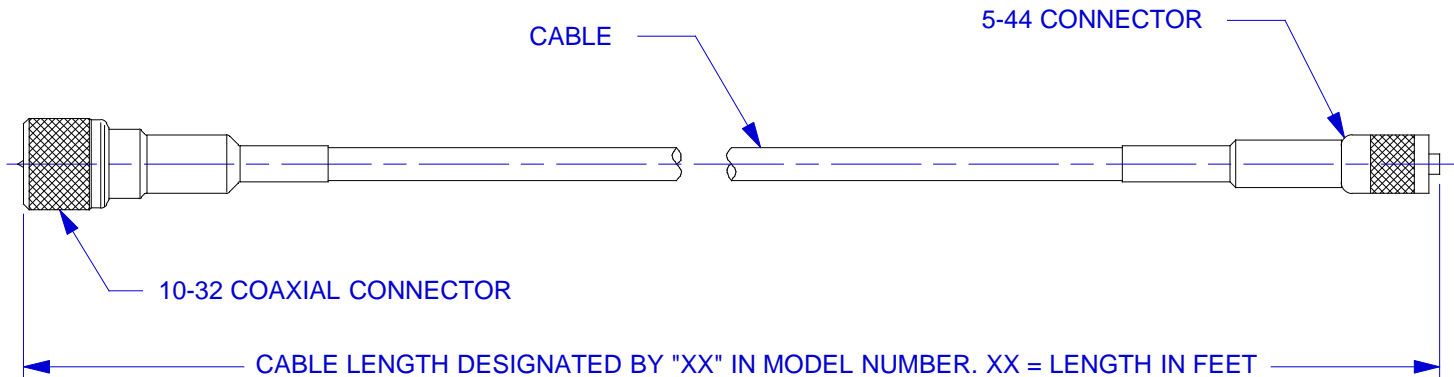

		CHATSWORTH, CA.							
				SCALE	2X	REV	SEE CHART	DATE	SEE CHART
DATE		7/18/02		PART NO.		6017AXX			
DRAWN		N.C.		CHECKED		N.C.			
APPROVED		NEXT ASSEMBLY		USED ON		SEE CHART			
TITLE								DWG NO.	
OUTLINE/INSTALLATION DRAWING,, CABLE, 10-32 TO 5-44, MODEL 6017A								127-6017A	
								SHEET 1 OF 1	

EXCEPT AS OTHERWISE NOTED

ALL DIMENSIONS IN INCHES
TOLERANCE: .XXX = ± .XX = ±

SURFACE FINISH EXCEPT AS NOTED ✓

BREAK EDGES TO DEBURR RADIUS OR CHAMFER MAX

△ THESE DIAS ⊙ TO T.I.R.

FILLETS - MAX RAD.

ALL PART NUMBER LETTERSUFFIXES ARE TO BE INTERPRETED AS FOLLOWS:

M - MACHINED ONLY (UNPLATED) G - MATERIAL HAS BEEN GRAINED
 P - PLATED/PAINTED S - MATERIAL HAS BEEN SAWCUT
 H - HEAT TREATED E - ENVIRONMENTAL TEST

I.E. - 107-0000-01 (X)