


PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DYTRAN INSTRUMENTS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DYTRAN INSTRUMENTS INC. IS PROHIBITED

REVISIONS

REV	ECN	DESCRIPTION	BY/DATE	CHK	APPR
D	6309	REDRAWN WITH CHANGES	RA, 10/12/09	<i>[Signature]</i>	<i>[Signature]</i>

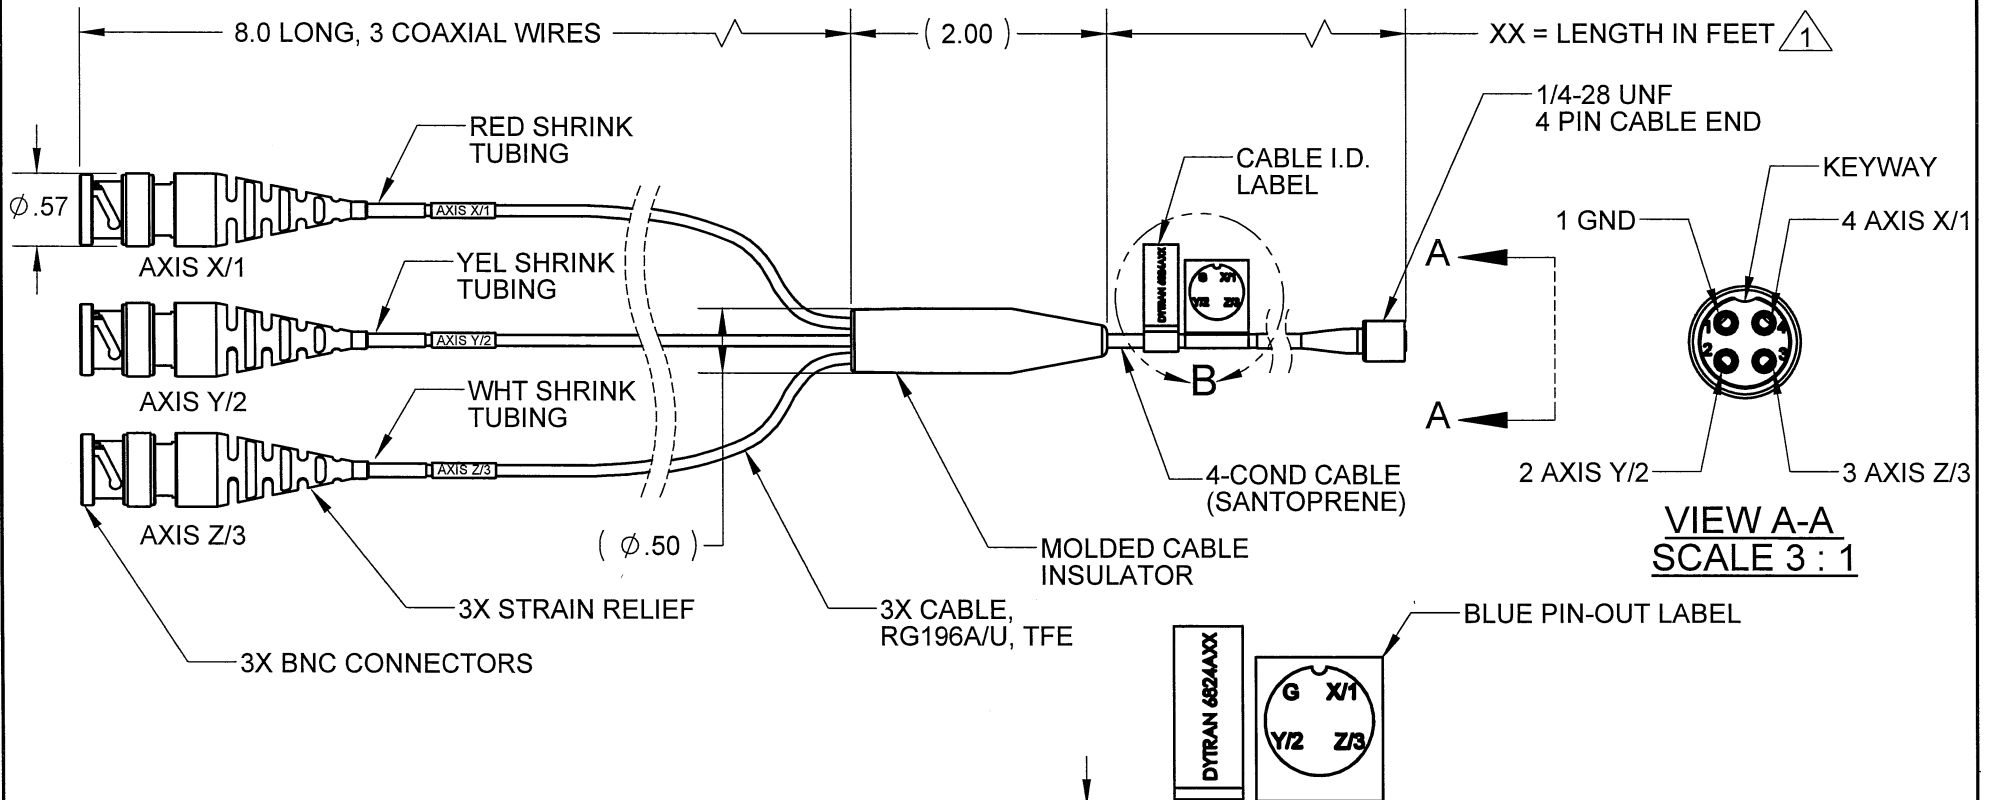

2. TEMPERATURE RATING: -55°C TO 120°C

1 XX=WILL VARY IN FEET PER CUSTOMER REQUIREMENTS, FOR EXAMPLE: 6824A10 = 10 FT CABLE LENGTH.

NOTES: UNLESS OTHERWISE SPECIFIED

6824AXX	USED ON	NEXT ASSY
APPLICATION		
THIRD ANGLE PROJECTION USA		
UNLESS OTHERWISE SPECIFIED: INTERPRET DIM & TOL PER ASME Y14.5M - 1994. REMOVE BURRS. COUNTERSINK INTERNAL THDS 90° TO MAJOR DIA. CHAM EXT THDS 45° TO MINOR DIA. THD LENGTHS AND DEPTHS ARE FOR MIN FULL THDS. THDS PER MIL-S-7742. DIMENSIONS APPLY AFTER FINISHING. ALL MACHINED SURFACES: TOTAL RUNOUT WITHIN .005. BREAK SHARP EDGES .005 TO .010. MACHINED FILLET RADII .005 TO .015. WELDING SYMBOLS PER AWS A2.4. ABBREVIATIONS PER MIL-STD-12.		

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES. TOLERANCES ARE:	
INCHES .XX ± .25	
MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

CONTRACT NO.			
APPROVALS		DATE	
ORIG	RA	1/20/04	
CHK	MPH	12/20/06	
APP	CES	12/20/06	
APP			

DYTRAN INSTRUMENTS, INC. **MASTER ONLY IF IN RED**
Chatsworth, CA

TITLE: **OUTLINE/INSTALLATION DRAWING, MINI 4 PIN TO (3) BNC, MODEL 6824A**

SIZE A	CAGE CODE 2W033	DWG. NO. 127-6824A	REV D
SCALE: 1:2		SOLIDWORKS	SHEET 1 OF 1